


## PRODUCT SHEET & SPECIFICATIONS

# i.Net DOOR BELL INTERFACE

MODEL G977

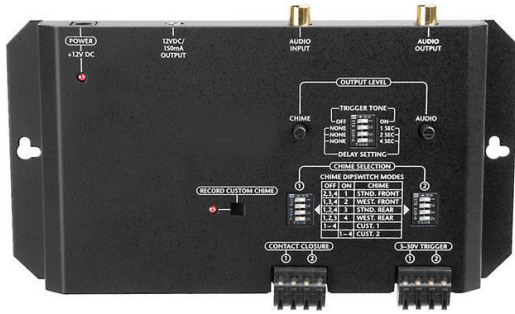

## FUNCTION

The G977 Doorbell Interface provides pleasant doorbell chimes. External contact closure and voltage triggers are combined with a programmable trigger tone/delay to integrate with control systems.

The G977 includes a choice of four pre-recorded and two custom recordable chimes to provide the appropriate doorbell chime. A UL-listed, universal voltage power supply is included for your convenience.

## FEATURES AND CAPABILITIES

- + Four selectable preprogrammed chimes and two recorded sound options
- + Two doorbell inputs, triggered by voltage or contact closure via a screwless two piece connector
- + Both doorbell inputs support standard or lighted doorbell buttons
- + Separate level adjustments provided for chime
- + One gold-plated mono audio sensing input
- + One gold-plated mono audio output
- + UL-listed in-line power supply with universal voltage capability

## SPECIFICATIONS

- + Audio
  - Chime: 100 Hz ~ 3 kHz, +/- 3 dB
  - Audio Pass Through: 20 Hz ~ 20 kHz, +/- 0.5 dB
- + Trigger Inputs
  - Voltage Trigger Input: 3V-30V AC/DC
  - Contact Closure Inputs: < 10 ohms
- + Power Supply
  - Input: 100-240V AC 50-60 Hz 0.5 A
  - Output: 12V DC 1.25 A
- + Unit Dimensions
  - 7-7/8" W x 4-1/8" H x 1" D
  - 20 cm W x 10.5 cm H x 2.5 cm D